



SHP4WD-CNC-3000B Horizontal CNC Four Corner Welding Machine
塑料門窗臥式多層數控共擠四角焊接機



焊接框最小尺寸 Min. welding range

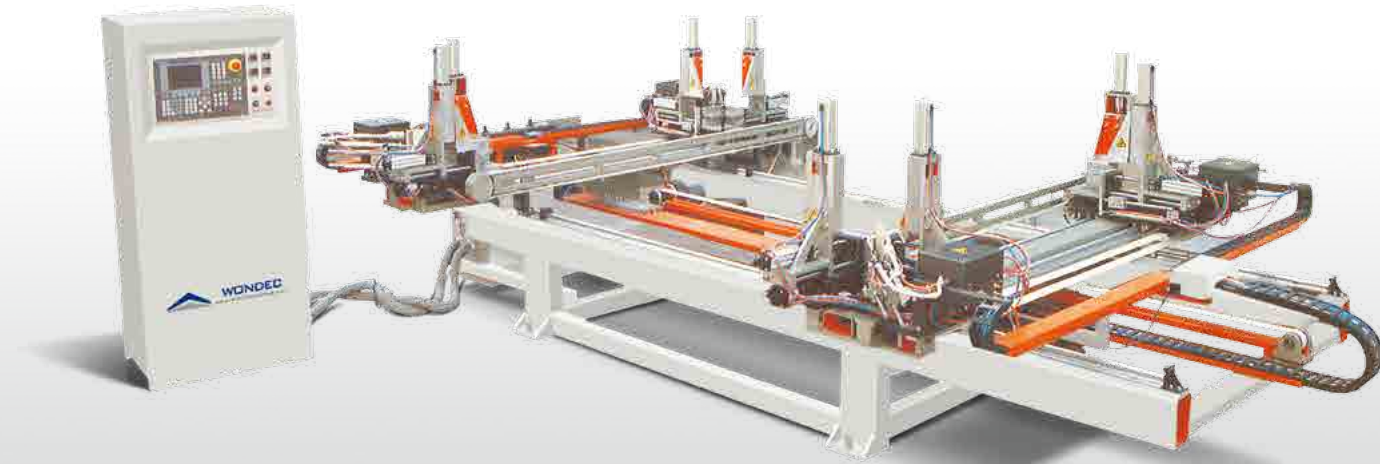

焊接框最大尺寸 Max. welding range




One time clamping can realize the welding of the rectangular frame fan products, imported CNC system control, high precision of welding products, can weld multi-layer profiles once, to achieve the micro welding of coextrude profiles.

一次裝夾可實現矩形框扇制品的焊接成形，整套進口數控系統控制，焊接制品精度高，一次可焊接多層型材，實現共擠型材的微縫焊接。


Technical Parameter 技術參數

SHP4WD-CNC-3000B		
Air pressure	工作氣壓	0.5~0.8MPa
Air consumption	耗氣量	100L/min
Power supply	輸入電源	380V/ 50Hz
Input power	輸入功率	9kW
Welding height	焊接型材高度	25~160mm
Welding width(Max.)	焊接型材寬度	120mm
Welding range	焊接範圍	500×650~1800×3000mm
Overall dimension	外型尺寸	5100×3050×1500mm
Weight	重量	About 3000kg

SHP4-CNC-3000G Vertical CNC Four Corner Welding Machine
高檔塑料門窗數控四角焊接機

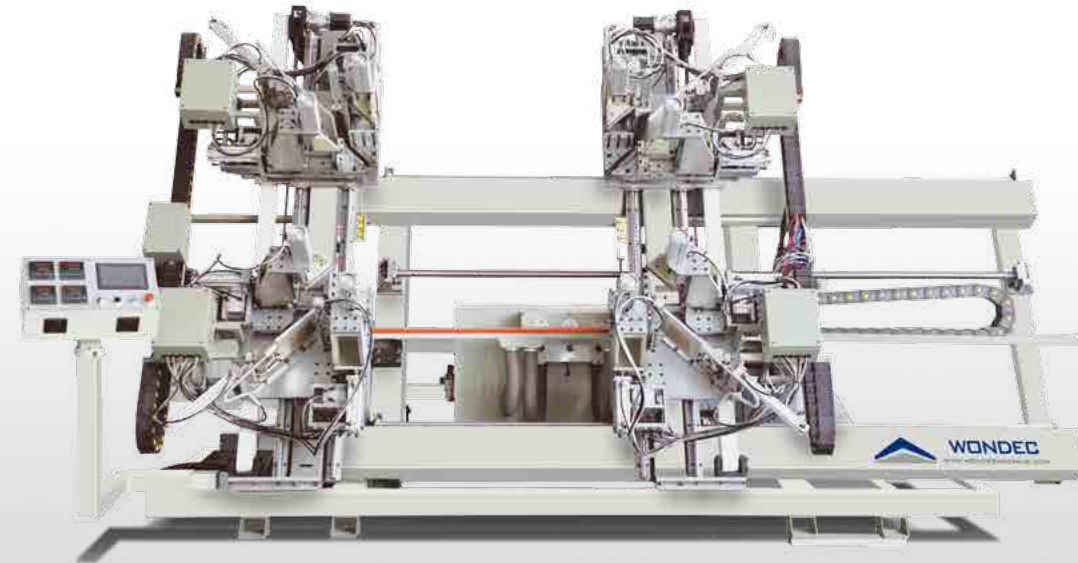

焊接框最小尺寸 Min. welding range



焊接框最大尺寸 Max. welding range



One time clamping can realize the welding of the rectangular frame and sash products, with seamless and seam welding transfer, multi - purpose, high welding strength, high precision.


一次裝夾可實現矩形框扇制品的焊接成形，有縫無縫焊接形式可轉換、多用途、高焊接強度、高精度。

Technical Parameter 技術參數

SHP4-CNC-3000G		
Air pressure	工作氣壓	0.5~0.8MPa
Air consumption	耗氣量	100L/min
Power supply	輸入電源	380V/ 50Hz
Input power	輸入功率	9kW
Welding height	焊接型材高度	25~160mm
Welding width(Max.)	焊接型材寬度	120mm
Welding range	焊接範圍	400×400~1800×3000mm
Overall dimension	外型尺寸	5000×2000×2850mm
Weight	重量	About 3000kg

SHP4-CNC-3000A/B

塑料門窗數控四角焊接機
Vertical CNC Four Corner Welding Machine

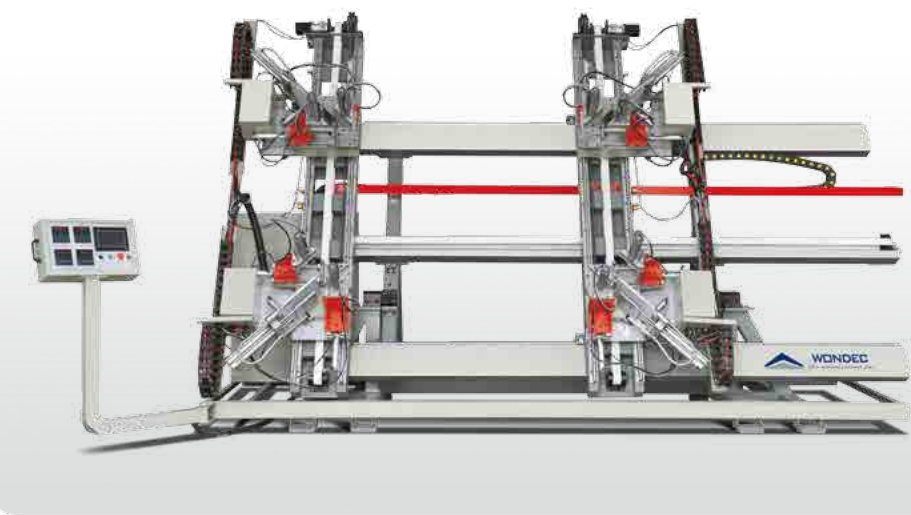

SHP4-3000A/B

塑料門窗四角焊接機
Vertical Four Corner Welding Machine



SHP4-CNC-3000A/B

Suitable for uPVC doors and windows of frame and sash welding, CNC control system, can finish rectangular frame in one welding process.

適用於塑料門窗矩形框、扇的焊接成型，數控系統控制，可一次性完成一個矩形框的焊接過程。

SHP4-3000A/B

Suitable for uPVC doors and windows of frame and sash welding, can finish rectangular frame in one welding process.

適用於塑料門窗矩形框、扇的焊接成型，可一次性完成一個矩形框的焊接過程。

Technical Parameter 技術參數

		SHP4-CNC-3000A/B	SHP4-3000A/B
Air pressure	工作氣壓	0.5~0.8MPa	0.5~0.8MPa
Air consumption	耗氣量	200L/min	200L/min
Power supply	輸入電源	380V/ 50Hz	380V/ 50Hz
Input power	輸入功率	9kW	7kW
Welding height	焊接型材高度	25~160mm	25~160mm
Welding width(Max.)	焊接型材寬度	120mm	120mm
Welding range	焊接範圍	350×350~1800×3000mm	350×350~1800×3000mm
Overall dimension	外型尺寸	5000×2000×2850mm	5000×2000×2850mm
Weight	重量	About 3000kg	About 2600kg

SHZ4GA-120×4500

高檔彩色塑料門窗專用焊接機
Four Head Seamless Welding Machine



Used for seamless welding of colored uPVC window, good welding finish, which can clean welding tumor one time, good and advanced looking.

適用於彩色塑料門窗焊接完成后將焊瘤一次性清理完成，焊口十分美觀、高檔，焊接强度高于原有型材的角强度。

Technical Parameter 技術參數

		SHZ4GA-120×4500	SHZ3GA-120×3500	SHZ2GA-120×3500
Air pressure	工作氣壓	0.5~0.7MPa	0.5~0.7MPa	0.5~0.7MPa
Air consumption	耗氣量	200L/min	150L/min	100L/min
Power supply	輸入電源	380V/ 220V/ 50Hz	380V/ 220V/ 50Hz	380V/ 220V/ 50Hz
Input power	輸入功率	4.5kW	3.5kW	2.5kW
Welding height	焊接型材高度	20~120mm	20~120mm	20~120mm
Welding width(Max.)	焊接型材寬度	100mm	100mm	100mm
Welding range	焊接範圍	400×4500mm	400×3500mm	400×3500mm
Overall dimension	外型尺寸	5500×1250×1740mm	4500×1250×1740mm	3500×1250×1740mm
Weight	重量	About 2000kg	About 1250kg	About 1000kg



SHZ3GA-120×3500(三位)



SHZ2GA-120×3500(二位)



SHZ4G-120×4500 Four Head Seamless Welding Machine
塑料門窗（可轉換）無縫四位焊接機



SHZ3G-120×3500(三位)



SHZ2G-120×3500(二位)



Suitable for seamless welding of laminated colored profile, coextruder profile and painting profile in one surface.

適用於焊接彩色覆膜、雙色共擠、噴塗等型材，實現單面無縫焊接。

Technical Parameter 技術參數				
		SHZ4G-120×4500	SHZ3G-120×3500	SHZ2G-120×3500
Air pressure	工作氣壓	0.4~0.6MPa	0.4~0.6MPa	0.5~0.7MPa
Air consumption	耗氣量	200L/min	150L/min	100L/min
Power supply	輸入電源	220V/ 50Hz	220V/ 50Hz	220V/ 50Hz
Input power	輸入功率	4.5kW	3.5kW	2.5kW
Welding height	焊接型材高度	20~120mm	20~120mm	20~120mm
Welding width(Max.)	焊接型材寬度	100mm	100mm	100mm
Welding range	焊接範圍	400×4500mm	400×3500mm	400×3500mm
Overall dimension	外型尺寸	5400×1100×1700mm	4400×1250×1740mm	3400×1250×1740mm
Weight	重量	About 1500kg	About 1100kg	About 900kg


SHZ4A-120×4500 Four Head Welding Machine
塑料門窗四位焊接機



SHZ3A-120×3500(三位)



SHZ2A-120×3500(二位)

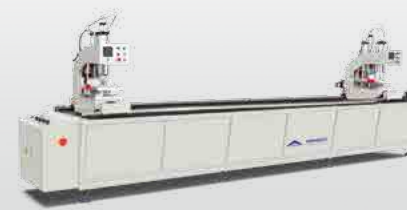

Suitable for uPVC doors and Windows white profile of high quality welding, programmable controller, high reliability.

適用於塑料門窗白色型材的高品質焊接，可編程控制器，可靠性高。

Technical Parameter 技術參數				
		SHZ4A-120×4500	SHZ3A-120×3500	SHZ2A-120×3500
Air pressure	工作氣壓	0.4~0.6MPa	0.4~0.6MPa	0.5~0.7MPa
Air consumption	耗氣量	200L/min	150L/min	100L/min
Power supply	輸入電源	220V/50Hz	220V/ 50Hz	220V/ 50Hz
Input power	輸入功率	4.5kW	3.5kW	2.5kW
Welding height	焊接型材高度	20~120mm	20~120mm	20~120mm
Welding width(Max.)	焊接型材寬度	100mm	100mm	100mm
Welding range	焊接範圍	400×4500mm	400×3500mm	400×3500mm
Overall dimension	外型尺寸	5400×1100×1700mm	4400×1100×1700mm	4400×1100×1700mm
Weight	重量	About 1500kg	About 1100kg	About 900kg

SHZ01-100 Single Head Welding Machine
塑料門窗單頭焊接機



SH01 Single Point Welding Machine
塑料門窗單點任意角焊接機



SHZ01-100
Can complete 𠃍 𠃍 forms of welding (arbitrary angle welding optional).Many datas can be adjusted.
可以完成 𠃍 𠃍形式的焊接（任意角焊接選配），各工藝參數連續可調。

SH01
30°~180° welding available,especially for arch window and special angle window.
可對型材進行 30° ~ 180° 之間的任意角度焊接，特別適合用于圓弧窗、特殊角度窗等異型窗焊接。

Technical Parameter 技術參數			
		SHZ01-100	SH01
Air pressure	工作氣壓	0.5~0.8MPa	0.5~0.8MPa
Air consumption	耗氣量	50L/min	50L/min
Input voltage	輸入電源	220V/ 50Hz	220V/ 50Hz
Input power	輸入功率	1.2kW	1.5kW
Welding height	焊接型材高度	25~100/120mm	25~120mm
Welding width(Max.)	焊接型材寬度	120mm	230mm
Overall dimension	外型尺寸	760×690×1700mm	960×900×1460mm
Weight	重量	About 260kg	About 260kg

LJJZ-100 CNC Cutting Center
塑料型材數控鋸切加工中心



Complex type window system cutting solution, for uPVC profiles automatically 45 degrees, V-shaped and mullion fixed length cutting, suitable for the production of large quantities of high quantity windows and doors.
復雜窗型系統解決方案之鋸切單元，用于自動實現塑料型材 45°、V 型口及中梃的定尺切割，適用於大批量高檔門窗制作。

Technical Parameter 技術參數		
		LJJZ-100
Power supply	輸入電源	380V/ 50Hz
Input power	輸入功率	9kW
Air pressure	工作壓力	0.5-0.8MPa
Air consumption	耗氣量	60L/min
Saw blade specification	鋸片規格	Φ500×4.3×Φ30mm
Motor rotary speed	鋸片轉速	3000r/min
Cutting width	切割寬度	Max 90mm
Cutting height	切割高度	框扇型材 Frame/Sash 120mm
Min. cutting length	切割最小長度	框扇型材 Frame/Sash 400mm
Cutting length range	加工型材長度範圍	根據用戶需要設定 Customized max6000mm
Overall dimension	外形尺寸	11900×4300×2400mm
Weight	重量	About 3600kg

LJZ2C-420×4000 Double Mitre Saw
鋁塑型材雙角切割鋸



Used for high efficient cutting aluminum-uPVC profile. It can automatically realize 45°, 90° cutting conversion, large cutting stroke, and can cut the maximum width 260mm. It can also cut 4 materials at a time for the 60 mm series .

適用於鋁塑型材高效鋸切加工，可自動實現 45° ,90° 鋸切轉換，鋸片切割行程大，可鋸切最大型材寬度 260mm，也可一次進行 60mm 系列以下 4 根料的切割。

Technical Parameter 技術參數

LJZ2C-420×4000		
Air pressure	工作氣壓	0.5~0.8MPa
Air consumption	耗氣量	30L/min
Input voltage	輸入電源	380V/ 50Hz
Input power	輸入功率	3.0kW
Motor rotary speed	主軸轉速	3300r/min
Cutting height	鋸切高度	90~105mm
Cutting width	鋸切寬度	120~240mm
Cutting length	鋸切長度	430~4200/5000mm
Overall dimension	外型尺寸	6000×1400×1400mm
Weight	重量	About 1500kg

LJZ2A-450×3600 Double Mitre Saw
鋁塑型材雙角切割鋸



Used for high efficient cutting of aluminum-uPVC profile. It can automatically realize 45°, 90° sawing conversion, angle adjustment device, convenient angle conversion.

適用於鋁塑型材高效鋸切加工，可自動實現 45° ,90° 鋸切轉換，設置角度調整裝置，角度轉換方便。

Technical Parameter 技術參數

LJZ2A-450×3600		
Air pressure	工作氣壓	0.5~0.8MPa
Air consumption	耗氣量	50L/min
Power supply	輸入電源	380V/ 50Hz
Input power	輸入功率	3.0kW
Spindle rotary speed	主軸轉速	2800r/min
Cutting height	鋸切高度	20~150mm
Cutting width	鋸切寬度	120mm
Cutting length	鋸切長度	290~3600mm
Overall dimension	外型尺寸	5000×1300×1650mm
Weight	重量	About 1200kg

LJZ2-350×3500 Double Mitre Saw
雙角切割鋸



LJB-350 Single Mitre Saw
單頭切割鋸



Used for cutting the uPVC profiles at angles of -45°~90°~45° .
適用於鋁塑型材 -45° ~ 90° ~ 45° 的定尺定角度切割加工。

Technical Parameter 技術參數			
		LJZ2-350×3500	LJB-350
Air pressure	工作氣壓	0.4~0.6MPa	0.4~0.6MPa
Air consumption	耗氣量	30L/min	15L/min
Power supply	輸入電源	380V/ 50Hz	220V/ 50Hz
Input power	輸入功率	2×1.5kW	1.5kW
Motor rotary speed	主軸轉速	3200r/min	3200r/min
Saw blade specification	鋸片規格	Φ350×Φ30×4×120T	Φ350×Φ30×4×120T
Cutting angle	切割角度	-45°~90°~45°	-45°~90°~45°
Cutting height	鋸切高度	100mm	100mm
Cutting width	鋸切寬度	120mm	120mm
Cutting length	鋸切長度	450~3500mm	/
Overall dimension	外型尺寸	4000×1120×1450mm	750×1120×1450mm
Weight	重量	About 550kg	About 150kg

SJV-55 Mullion Saw
塑料型材中梃切割鋸



Used for mullion cutting of the uPVC door and window frame, the v - shaped head cutting, and cutting two v- shaped heads at one time cutting, and the cutting precision is high and the production efficiency is high.
適用於塑料門窗中梃，采用焊接工藝時，中梃型材 V 型頭的鋸切，一次裝夾同時完成兩個 V 形頭的切割，鋸切精度高、生產效率高。

Technical Parameter 技術參數		
		SJV-55
Air pressure	工作氣壓	0.5~0.8MPa
Air consumption	耗氣量	15L/min
Power supply	輸入電源	380V/ 50Hz
Input power	輸入功率	2.2kW
Motor rotary speed	主軸轉速	2800r/min
Cutting height	鋸切高度	90/110mm
Cutting width	鋸切寬度	80/100mm
Cutting length	鋸切長度	300~2100mm
Overall dimension	外型尺寸	7500×1720×1390mm
Weight	重量	About 300kg

LJVV-60 V Notch Saw
鋁塑型材 V 型切割鋸



SJBW-1800 Glazing Bead Saw
塑料型材玻璃壓條鋸



LJVV-60
For 90° V-shaped groove cutting of uPVC profile.
適用於鋁塑型材 90° V 型槽的切割加工。

SJBW-1800
For 45° glass bead cutting of uPVC profile.
適用於玻璃壓條 45° 切斷及壓角的銑削。

Technical Parameter 技術參數			
		LJVV-60	SJBW-1800
Air pressure	工作氣壓	0.4~0.6MPa	0.5~0.8MPa
Air consumption	耗氣量	20L/min	20L/min
Power supply	輸入電源	380V/ 50Hz	380V/ 50Hz
Input power	輸入功率	2.2kW	2.2kW
Motor rotary speed	主軸轉速	2800r/min	2800r/min
Cutting width	鋸切寬度	120mm	100mm
Cutting height	鋸切高度	20~60mm	33mm
Cutting length	鋸切長度	300~1700mm	320~1800mm
Overall dimension	外型尺寸	1350×500×1350mm	1350×600×1350mm
Weight	重量	About 200kg	About 250kg

LXCZ2 Double Head Water Slot Milling Machine
塑料型材雙頭水槽銑床



Used for milling all kinds of water slots and air presure balance grooves,two sets of three-axis milling heads.
適用於塑料門窗型材各種類型排水槽、氣壓平衡槽的銑削加工，沿導軌布置有兩組三軸銑削機頭。

Technical Parameter 技術參數			
		LXCZ2	LXCA-60
Power supply	輸入電源	220V/ 50Hz	220V/ 50Hz
Input power	輸入功率	2.28kW	1.14kW
Air pessure	工作氣壓	0.5~0.8MPa	0.5~0.8MPa
Air consumption	耗氣量	50L/min	30L/min
Main-shaft rotary speed	主軸轉速	25000r/min	25000r/min
Cutter diameter	銑刀直徑	Φ4 Φ5mm	Φ4 Φ5mm
Slot depth	銑槽深度	30mm	30mm
Slot width	銑槽寬度	4~5mm	4~5mm
Slot length	銑槽長度	30~60mm	30~60mm
Overall dimension	外型尺寸	4300×1450×1650mm	950×1000×1800mm
Weight	重量	About 700kg	About 300kg



LXCA-60 Water Slot Milling Machine
塑料型材自動水槽銑

LXC01-2/3/4

塑料型材自動水槽銑
Water Slot Milling Machine



LXC01-2/3/4

Used for milling all kind of water slots and air pressure balance grooves.
適用於塑料門窗各種類型排水槽、氣壓平衡槽的加工。

SFX-18×20

Used for the uPVC sliding window profiles rail slot milling.
適用於塑料推拉窗封蓋型材與推拉框型材軌道配合槽口的銑削加工。

SFX-18×20

塑料型材封蓋銑床
Cap Seal Milling Machine



CSQ-120

單面手提清角機
Portable Corner Cleaning Machine



CSXN

內角銑
Internal Corner
Cleaning Machine



CSXW

外角銑
External Corner
Cleaning Machine



Technical Parameter 技術參數

		LXC01-2/3/4	SFX-18×20
Power supply	輸入電源	220V/ 50Hz	220V/ 50Hz
Input power	輸入功率	0.38kW×2/3/4	0.75kW
Air pressure	工作氣壓	0.5~0.8MPa	/
Air consumption	耗氣量	30L/min	/
Main-shaft rotary speed	主軸轉速	25000r/min	2800r/min
Cutter diameter	銑刀直徑	Φ4 Φ5mm	/
Slot depth	銑槽深度	30mm	/
Slot length	銑槽長度	30~60mm	/
Overall dimension	外型尺寸	1925×750×1600mm	560×485×955mm
Weight	重量	About 200kg	About 75kg

SQJA-CNC-120

CNC Corner Cleaning Machine
塑料門窗數控角縫清理機



SQJA-CNC-120

Used for cleaning vertical surance of outer corner, bevel surface of outer corner, arch surface of outer corner, top and bottom surface of welding corner of uPVC doors and windows. CNC system control, easy operation.

適用於塑料門窗的焊角外立面、外角斜面、外角橢圓弧、上下平面焊縫。

SQJ-CNC-120

Used for cleaning vertical surance of outer corner, bevel surface of outer corner, arch surface of outer corner, rubber seal position, top and bottom surface of welding corner of uPVC doors and windows.

適用於塑料門窗焊角后外立面、上下平面焊縫，密封膠條槽等部位的清理，數控系統控制，操作簡單高效。

SQJ-CNC-120

CNC Corner Cleaning Machine
塑料門窗數控角縫清理機



Technical Parameter 技術參數

		SQJA-CNC-120	SQJ-CNC-120
Power supply	輸入電源	380V/ 50Hz	380V/ 50Hz
Input power	輸入功率	5kW	3kW
Milling cutter rotary speed	主銑刀轉速	2800r/min	2800r/min
Air pressure	工作氣壓	0.5~0.8MPa	0.5~0.8MPa
Air consumption	耗氣量	80L/min	60L/min
Profile height	加工型材高度	25~90mm	30~120mm
Profile width	加工型材寬度	20~120mm	20~120mm
Overall dimension	外型尺寸	1570×2670×2070mm	2000×1820×1500mm
Weight	重量	About 700kg	About 650kg

SQJ01-120

塑料門窗角縫清理機
Corner Cleaning Machine



SQJ01-120

Used for cleaning outer vertical surface, top and bottom surface of welding corner.

適用於塑料型材焊接成 90° 之后的上下兩平面焊縫和外角焊縫的清理。

SQJ06-120

Cleaning top and bottom surface of welding corner.

適用於塑料門窗框（扇）90° 焊角上下平面焊縫的清理。

SQV05-120

Special for cleaning V-shaped welding and cross welding.

適用於塑料門窗中梃 V 型焊接及十字焊接焊縫的清理。

SQJ06-120

塑料門窗平縫清理機
Corner Cleaning Machine



SQV05-120

塑料門窗 V 型角縫清理機
V Corner Cleaning Machine



Technical Parameter 技術參數

		SQJ01-120	SQJ06-120	SQV05-120
Power supply	輸入電源	380V/ 50Hz	220V/ 50Hz	220V/ 50Hz
Input power	輸入功率	1.1kW	0.2kW	0.2kW
Milling cutter rotary speed	主銑刀轉速	2800r/min	2800r/min	2800r/min
Air pressure	工作氣壓	0.5~0.8MPa	0.5~0.8MPa	0.5~0.8MPa
Air consumption	耗氣量	15L/min	15L/min	15L/min
Profile height	加工型材高度	35~120mm	25~120mm	40~120mm
Profile width	加工型材寬度	25~120mm	30~120mm	0~120mm
Overall dimension	外型尺寸	1050×670×1370mm	1050×670×1370mm	860×650×1120mm
Weight	重量	About 150kg	About 120kg	About 112kg

SYH01-1800 Arch Window Bending Machine

塑料門窗圓弧窗機



SYH01-1800

Suitable for bending uPVC profile. It is the special equipment of arch uPVC doors and windows.

適用於塑料門窗型材圓弧成型，是生產圓弧型塑料門窗的專用設備。

SZG

Suitable for plastic doors and Windows profiles of screw fastening efficiently,high production efficiency.

適用於塑料門窗型材的螺釘高效緊固，生產效率極高。

SZG4-90/SZG1-90 Automatic Screw Fastening Machine

塑料型材自動螺釘緊固機



Technical Parameter 技術參數

		SYH01-1800	SZG4-90	SZG1-90
Power supply	輸入電源	380V/ 220V/ 50Hz	220V/ 50Hz	220V/ 50Hz
Input power	輸入功率	8kW	1.44kW	0.36kW
Screw diameter	螺釘頭直徑	/	3.0~5.0mm	3.0~4.5mm
Air pressure	工作氣壓	0.5~0.8MPa	0.5~0.8MPa	0.5~0.8MPa
Screw length	螺釘長度	/	13~26 mm	13~26 mm
Feeding speed	單槍進釘速度	/	30~80 screws per minute	30~80 screws per minute
Profile height	加工型材高度	/	120mm	35~95mm
Overall dimension	外型尺寸	4500×2800×800mm	3450×480×1850mm	1050×670×1370mm
Weight	重量	About 350kg	About 150kg	About 80kg